

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

SPONSOR: **ClarkDietrich**
West Chester, OH

Sound Transmission Loss
RAL™-TL25-584

CONDUCTED: 2025-12-18

Page 1 of 16

ON: 6 in (152mm) SilentXpress™ Sound Wall – Stud pack [2-1/2 in (64 mm). dbl. stud bridged with type CWSC Clip] spaced at 24 in. (610mm) o.c. – 2 Layers 5/8in. (16 mm) Type-X, Source Side - (6 in. (152 mm) R-24 Insulation, stud web not filled) - 2 Layers 5/8 in. (16 mm) Type-X, Receive Side

TEST METHODOLOGY

Riverbank Acoustical Laboratories™ is accredited by the U.S. Department of Commerce, National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) as an ISO 17025:2017 Laboratory (NVLAP Lab Code: 100227-0) and for this test procedure. The test reported in this document conformed explicitly with ASTM E90-09 (2016): "Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements." The single number rating of the specimen was calculated according to ASTM E413-22: "Classification for Rating Sound Insulation." A description of the measurement procedure and room specifications is available upon request. The transmission loss values are for a single direction of measurement. The results presented in this report apply to the sample as received from the test sponsor.

INFORMATION PROVIDED BY SPONSOR

The test specimen was designated by the sponsor as 6 in (152mm) SilentXpress™ Sound Wall – Stud pack [2-1/2 in (64 mm). dbl. stud bridged with type CWSC Clip] spaced at 24 in. (610mm) o.c. – 2 Layers 5/8in. (16 mm) Type-X, Source Side - (6 in. (152 mm) R-24 Insulation, stud web not filled) - 2 Layers 5/8 in. (16 mm) Type-X, Receive Side. The following nominal product information was provided by the sponsor prior to testing. The accuracy of such sponsor-provided information can affect the validity of the test results.

Product Under Test

Product Name: SilentXpress™ (CWSC)
Manufacturer: ClarkDietrich

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

RAL™-TL25-584

Page 2 of 16

ClarkDietrich
2025-12-18

SPECIMEN MEASUREMENTS & TEST CONDITIONS

The building contractor (Seth Priser) and RAL staff compiled a detailed construction specification as follows:

Tracks (Top & Bottom)

Material: ProTRAK20 (18 mil)
Manufacturer: ClarkDietrich
Dimensions: 2 tracks @ 2438 mm (96 in.) wide by 32 mm (1.25 in.) high, each
Depth: 152 mm (6 in.)
Metal Thickness: 18 mil - 0.48 mm (0.01875 in.)
Installation: Friction fit over sill sealer
Overall Weight: 3.86 kg (8.5 lbs)
Mass per Unit Length: 0.79 kg/m (0.53 lbs/ft)

SilentXpress™ Stud-Packs

Material: ProSTUD 20 (18 mil)
Dimensions: 5 stud-packs, in pairs of 64 mm (2.5 in.) deep by 2743 mm (108 in.) tall studs.
Depth: 152 mm (6 in.) Studs-pack consisting of 64 mm (2.5 in.) each, installed as described below
Steel Thickness: 18 mil - 0.49 mm (0.01945 in.)
Stud Spacing: SilentXpress™ Stud-Pack spaced 610 mm (24 in.) on center
Installation: Studs installed in pairs with approx. 25 mm (1 in.) space in between each, and connected by SilentXpress™ Sound Clips (Type CWSC)
Stud-packs fastened to tracks, 1 screw at track flange to stud flange intersection as required by UL design.
End wall stud-pack oriented with the web of the studs to the edge of test frame and fastened to test frame at midpoint with 1 screw
Fasteners: #8 Wafer head studs screws
Overall Weight: 14.06 kg (31 lbs)
Mass per Unit Length: 0.51 kg/m (0.34 lbs/ft)

Note: A bead of acoustical sealant was used to seal the source side of the specimen where framing members met the test frame (1.13 kg (2.5 lbs) total).



NVLAP LAB CODE 100227-0

RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

ClarkDietrich
2025-12-18

RAL™-TL25-584

Page 3 of 16

SPECIMEN MEASUREMENTS & TEST CONDITIONS (continued)

SilentXpress™ Sound Clips (Type CWSC)

Materials: 33 mil – 0.88 mm (0.0346 in.) steel clip with isolating rubber grommets
Dimensions: 9 clips @ 25 mm (1 in.) wide by 38 mm (1.5 in.) high
Depth: 133 mm (5.25 in.)
Installation: 9 SilentXpress™ clips were installed, fastened to stud-packs with fasteners, 1 fastener at each clip-to-stud isolation grommet, clips were spaced 178 mm (7 in.) from bottom track, 178 mm (7 in.) from top track, and a midpoint of stud-pack. 1372mm (54 in.)
Fasteners: Type S bugle head drywall screws, 41 mm (1.625 in.) long
Overall Weight: 0.79 kg (1.75 lbs)

Source Room Side

Base Layer

Material: Type X gypsum board
Dimensions: 2 panels @ 1219 mm (48 in.) wide by 2743 mm (108 in.) high
Thickness: 16 mm (0.625 in.)
Installation: Panels installed with long dimension vertically and fastened to studs with screws
Fasteners: Type S bugle head drywall screws, 32 mm (1.25 in.) long
Fastener Spacing: 406 mm (16 in.) on center, at board edges and field.
Overall Weight: 73.14 kg (161.25 lbs)
Mass Per Unit Area: 10.93 kg/m² (2.24 lbs/ft²)

Face Layer

Material: Type X gypsum board
Dimensions: 1 panel @ 1219 mm (48 in.) wide by 2743 mm (108 in.) high
2 panels @ 610 mm (24 in.) wide by 2743 mm (108 in.) high
Thickness: 16 mm (0.625 in.)
Installation: Panels installed vertically, fastened to studs through base layer with screws
Panel joints staggered from source side base layer panel joints
Fasteners: Type S bugle head drywall screws, 41 mm (1.625 in.) long
Fastener Spacing: 406 mm (16 in.) on center, at board edges and field, and offset 203 mm (8 in.) from base layer
Overall Weight: 73.94 kg (163 lbs)
Mass Per Unit Area: 11.05 kg/m² (2.26 lbs/ft²)



NVLAP LAB CODE 100227-0

RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

ClarkDietrich
2025-12-18

RAL™-TL25-584

Page 4 of 16

SPECIMEN MEASUREMENTS & TEST CONDITIONS (continued)

Receive Room Side

Base Layer

Material: Type X gypsum board
Dimensions: 1 panel @ 1219 mm (48 in.) wide by 2743 mm (108 in.) high
2 panels @ 610 mm (24 in.) wide by 2743 mm (108 in.) high
Thickness: 16 mm (0.625 in.)
Installation: Panels installed with long dimension vertically and fastened to studs with screws
Panel joints staggered from source side base layer panel joints
Fasteners: Type S bugle head drywall screws, 32 mm (1.25 in.) long
Fastener Spacing: 406 mm (16 in.) on center, at board edges and field.
Overall Weight: 74.05 kg (163.25 lbs)
Mass Per Unit Area: 11.07 kg/m² (2.27 lbs/ft²)

Face Layer

Material: Type X gypsum board
Dimensions: 2 panels @ 1219 mm (48 in.) wide by 2743 mm (108 in.) high
Thickness: 16 mm (0.625 in.)
Installation: Panels installed vertically, fastened through base layer to studs with screws
Panel joints staggered from receive side base layer panel joints
Fasteners: Type S bugle head drywall screws, 41 mm (1.625 in.) long
Fastener Spacing: 406 mm (16 in.) on center, at board edges and field, and offset 203 mm (8 in.) from base layer
Overall Weight: 73.48 kg (162 lbs)
Mass Per Unit Area: 10.99 kg/m² (2.25 lbs/ft²)

Note: Joints between gypsum board panels, and screw heads on both sides of the partition were treated with a thin bead of acoustical sealant and metal tape (0.45 kg (1 lbs) total).

Insulation

Materials: Fire and Sound Guard Plus
Manufacturer: Owens Corning/Thermafiber
Dimensions: 8 pieces @ 584 mm (23 in.) wide by 1219 mm (48 in.) high
4 pieces @ 584 mm (23 in.) wide by 305 mm (12 in.) high
Depth: 152 mm (6 in.)
Installation: Pieces friction fit in cavities between stud pairs
Overall Weight: 32.77 kg (72.25 lbs)
Mass per Unit Volume: 33.5 kg/m³ (2.09 lbs/ft³) as installed



NVLAP LAB CODE 100227-0

RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

RAL™-TL25-584

Page 5 of 16

ClarkDietrich
2025-12-18

SPECIMEN MEASUREMENTS & TEST CONDITIONS (continued)

Overall Specimen Measurements

Dimensions: 2.44 m (96.0 in) wide by 2.74 m (108.0 in) high
Thickness: 0.22 m (8.5 in)
Weight: 347.68 kg (766.5 lbs)
Overall Area: 6.689 m² (72. ft²)
Mass per Unit Area: 51.98 kg/m² (10.65 lbs/ft²)

Test Aperture

Opening Size: 2.74 m (9.0 ft.) by 4.27 m (14.0 ft.)
Filler Wall: Yes
Aperture Size: 2.44 m (96.0 in) wide by 2.74 m (108.0 in) high
Transmission Area: 6.689 m² (72. ft²)
Sealed: Entire periphery (both sides) with dense mastic

Test Environment

Source Room

Volume: 177.11 m³
Temperature: 21.7 °C ± 0.0 °C
Relative Humidity: 51.5 % ± 0.5 %

Receive Room

Volume: 178.33 m³
Temperature: 22.2 °C ± 0.0 °C
Relative Humidity: 49.5 % ± 0.5 %

Requirements

Temperature: 22° C +/- 2° C, not more than 3° C change over all tests.
Relative Humidity: ≥ 30%, not more than +/- 3% change over all tests.



NVLAP LAB CODE 100227-0

® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE
GENEVA, IL 60134

630-232-0104

ClarkDietrich
2025-12-18

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

RAL™-TL25-584

Page 6 of 16



Figure 1 – Specimen mounted in test aperture, as viewed from source room



Figure 2 – Specimen mounted in test aperture, as viewed from receive room

627 RIVERBANK DRIVE
GENEVA, IL 60134

630-232-0104

ClarkDietrich
2025-12-18

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

RAL™-TL25-584

Page 7 of 16



Figure 3 – Tracks, studs, and clips installed in test aperture



Figure 4 – Detail of studs and clips

627 RIVERBANK DRIVE
GENEVA, IL 60134

630-232-0104

ClarkDietrich
2025-12-18

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

RAL™-TL25-584

Page 8 of 16



Figure 5 – Base layer gypsum board installed on source side



Figure 6 – Face layer gypsum board partially installed on source side

627 RIVERBANK DRIVE
GENEVA, IL 60134

630-232-0104

ClarkDietrich
2025-12-18

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

RAL™-TL25-584

Page 9 of 16



Figure 7 – Insulation partially installed in stud cavities



Figure 8 – Insulation installed in stud cavities



NVLAP LAB CODE 100227-0

RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

RAL™-TL25-584

Page 10 of 16



Figure 9 – Base layer gypsum board partially installed on receive side

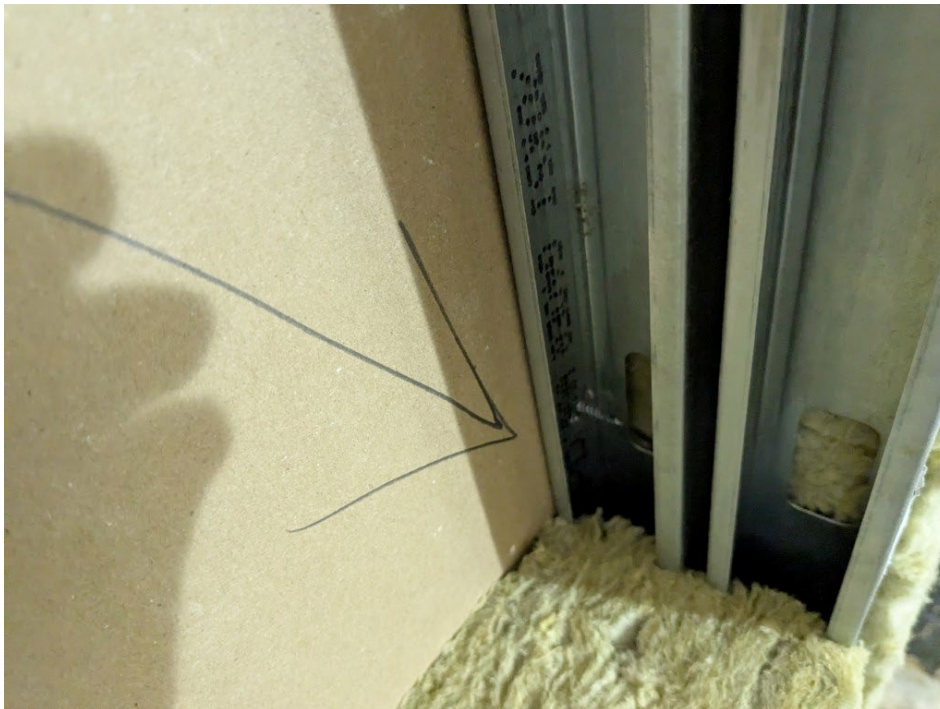


Figure 10 – Detail showing unfilled studs in wall cavity

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

RAL™-TL25-584

Page 11 of 16

ClarkDietrich
2025-12-18

TEST RESULTS

Sound transmission loss values are tabulated at the eighteen standard frequency bands. A graphic presentation of the data and additional information appear on the following pages. The precision of the transmission loss test data is within the limits set by the ASTM Standard E90-09 (2016). See Appendix A for identification of corrections applied to the reported data.

<u>FREQ.</u>	<u>TL</u>	<u>ΔTL</u>	<u>DEF.</u>	<u>FREQ.</u>	<u>TL</u>	<u>ΔTL</u>	<u>DEF.</u>
100	38	0.62	0	800	63	0.17	0
125	45	0.53	0	1000	65	0.10	0
160	46	0.38	0	1250	66	0.12	0
200	47	0.34	1	1600	65	0.12	0
250	50	0.38	1	2000	54	0.23	8
315	54	0.35	0	2500	56	0.10	6
400	56	0.33	1	3150	62	0.11	0
500	59	0.30	0	4000	65	0.09	0
630	61	0.22	0	5000	69	0.05	0

STC=58

ABBREVIATION INDEX

FREQ. = 1/3 OCTAVE BAND CENTER FREQUENCY, Hz

TL = TRANSMISSION LOSS, dB

ΔTL = 95% CONFIDENCE INTERVAL OVER DURATION OF THIS TEST, dB

DEF. = DEFICIENCIES, dB BELOW SHIFTED STC CONTOUR (SUM OF DEF = 17)

STC = SOUND TRANSMISSION CLASS


Tested by


Marc Sciaky
Senior Experimentalist

Report by


Keith Kimberling
Test Engineer

Approved by


Eric P. Wolfram
Laboratory Manager

Digitally signed by

Eric P Wolfram
Date: 2026.07.09
11:22:10 -05'00'



NVLAP LAB CODE 100227-0

RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE


ClarkDietrich
2025-12-18

RAL™-TL25-584

Page 12 of 16


SOUND TRANSMISSION REPORT

6 in (152mm) SilentXpress™ Sound Wall – Stud pack [2-1/2 in (64 mm). dbl. stud bridged with type CWSC Clip] spaced at 24 in. (610mm) o.c. – 2 Layers 5/8in. (16 mm) Type-X, Source Side - (6 in. (152 mm) R-24 Insulation, stud web not filled) - 2 Layers 5/8 in. (16 mm) Type-X, Receive Side

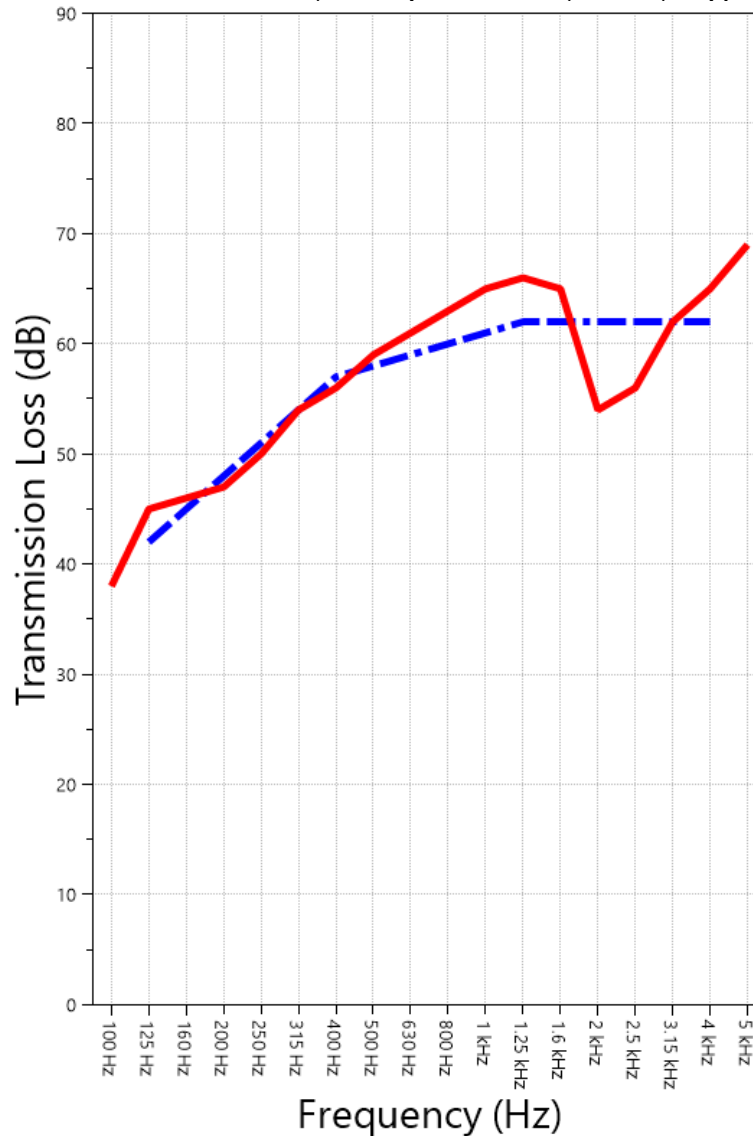

STC=58

OITC=48



TRANSMISSION LOSS

SOUND TRANSMISSION CLASS CONTOUR



NVLAP LAB CODE 100227-0

RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

ClarkDietrich
2025-12-18

RAL™-TL25-584

Page 13 of 16

APPENDIX A: Extended Frequency Range Data

Specimen: 6 in (152mm) SilentXpress™ Sound Wall – Stud pack [2-1/2 in (64 mm). dbl. stud bridged with type CWSC Clip] spaced at 24 in. (610mm) o.c. – 2 Layers 5/8in. (16 mm) Type-X, Source Side - (6 in. (152 mm) R-24 Insulation, stud web not filled) - 2 Layers 5/8 in. (16 mm) Type-X, Receive Side (See Full Report)

The following non-accredited data were obtained in accordance with ASTM E90-09 (2016), but extend beyond the defined frequency range of 100Hz to 5,000Hz. These unofficial results are representative of the RAL test environment only and intended for research & comparison purposes. Sampling precision observed during this procedure is reported below. Corrections are detailed in Appendix B.

1/3 Octave Band Center Frequency (Hz)	Sound Transmission Loss (dB)	Applicable Corrections	ΔTL (Eq. A2.5) (dB)	Repeatability (dB)
31.5	23	ZZ F	1.18	1.01
40	19	Z	1.17	2.26
50	17		0.45	1.52
63	23		0.74	1.47
80	32	Z F	0.88	0.60
100	38	Z F	0.62	0.67
125	45	Z F	0.53	0.71
160	46	Z F	0.38	0.35
200	47	Z F	0.34	0.33
250	50	Z F	0.38	0.42
315	54	Z F	0.35	0.41
400	56	Z	0.33	0.46
500	59		0.30	0.18
630	61		0.22	0.26
800	63		0.17	0.24
1000	65	Z F	0.10	0.27
1250	66	Z F	0.12	0.15
1600	65	Z F	0.12	0.12
2000	54		0.23	0.13
2500	56		0.10	0.19
3150	62		0.11	0.14
4000	65		0.09	0.17
5000	69	Z	0.05	0.17
6300	71	Z F	0.10	0.21
8000	69	Z F	0.06	0.50
10000	61	Z F	0.06	1.21
12500	55	Z	0.07	1.74



NVLAP LAB CODE 100227-0

RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

RAL™-TL25-584

Page 14 of 16

ClarkDietrich
2025-12-18

APPENDIX B: Glossary of Standardized Corrections and Adjustments

Specimen: 6 in (152mm) SilentXpress™ Sound Wall – Stud pack [2-1/2 in (64 mm). dbl. stud bridged with type CWSC Clip] spaced at 24 in. (610mm) o.c. – 2 Layers 5/8in. (16 mm) Type-X, Source Side - (6 in. (152 mm) R-24 Insulation, stud web not filled) - 2 Layers 5/8 in. (16 mm) Type-X, Receive Side (See Full Report)

Mark Interpretation

A Measured sound pressure levels in the receive room are within 10 dB of the ambient noise level at the marked frequency band. Receive room levels used to calculate Transmission Loss are corrected according to ASTM E90 Section 10.3.

AA Measured sound pressure levels in the receive room are within 5 dB of the ambient noise level at the marked frequency band. Receive room levels used to calculate Transmission Loss are corrected according to ASTM E90 Section 10.3.1. Transmission Loss values calculated from levels corrected this way will be less than or equal to Transmission Loss values from a hypothetical test using the same specimen and a receive room with idealized ambient sound levels of $(-\infty)$ dB.

F The reported Transmission Loss is within 10 dB of the laboratory flanking limit at the marked frequency band. The measured performance of the specimen may be limited by the performance of the laboratory building structure at this frequency band.

Z The reported Transmission Loss at the marked frequency band has been corrected according to ASTM E90 Section A3.2.7 to account for possible sound transmission through the filler assembly.

ZZ The reported Transmission Loss at the marked frequency band has been corrected according to ASTM E90 Section A3.2.8 to account for possible sound transmission through the filler assembly. Transmission Loss values corrected this way will be less than or equal to Transmission Loss values from a hypothetical test using the same specimen and an idealized filler assembly with a Sound Transmission Class rating of (∞) .

APPENDIX C: Glossary of Variability Metrics

Specimen: 6 in (152mm) SilentXpress™ Sound Wall – Stud pack [2-1/2 in (64 mm). dbl. stud bridged with type CWSC Clip] spaced at 24 in. (610mm) o.c. – 2 Layers 5/8in. (16 mm) Type-X, Source Side - (6 in. (152 mm) R-24 Insulation, stud web not filled) - 2 Layers 5/8 in. (16 mm) Type-X, Receive Side (See Full Report)

ΔTL, the 95% confidence interval for reported transmission loss values, is calculated from the standard deviation of the sets of measurements for source room sound pressure level, receive room sound pressure level, and receive room sound absorption. This metric is calculated in an effort to quantify the combined influences of room geometry, microphone positioning, and other varying environmental conditions on reported results.

Repeatability, expressed as a 95% confidence interval, is calculated from the standard deviation of transmission loss as obtained from a set of six (6) consecutive tests conducted according to this test method by RAL on 2020-02-13. The tests were performed on a specimen composed of 24 gauge steel paneling, using the same test opening as used in this report. This metric provides an estimate of the variation in results that might be observed if the test were repeated with no change to the installed specimen. Note that repeatability will vary with the construction type.



NVLAP LAB CODE 100227-0

RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

ClarkDietrich
2025-12-18

RAL™-TL25-584

Page 15 of 16

APPENDIX D: Determination of Outdoor Indoor Transmission Class (OITC)

Specimen: 6 in (152mm) SilentXpress™ Sound Wall – Stud pack [2-1/2 in (64 mm). dbl. stud bridged with type CWSC Clip] spaced at 24 in. (610mm) o.c. – 2 Layers 5/8in. (16 mm) Type-X, Source Side - (6 in. (152 mm) R-24 Insulation, stud web not filled) - 2 Layers 5/8 in. (16 mm) Type-X, Receive Side (See Full Report)

The determination of the Outdoor Indoor Transmission Class (OITC) as reported below was made with explicit conformity to the procedures described in the ASTM E1332-22 test standard. Test Method ASTM E90-09 (2016) was used to obtain the sound transmission loss data. This rating is based on an average transportation noise source spectrum and an A-weighted sound level reduction, either of which may be inappropriate for some applications.

One-third Octave Band Center Frequency, Hz	Reference Sound Spectrum, dB	Test Specimen Transmission Loss, dB
80	103	32
100	102	38
125	101	45
160	98	46
200	97	47
250	95	50
315	94	54
400	93	56
500	93	59
630	91	61
800	90	63
1000	89	65
1250	89	66
1600	88	65
2000	88	54
2500	87	56
3150	85	62
4000	84	65

$$OITC = 48$$



NVLAP LAB CODE 100227-0

RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

RAL™-TL25-584

Page 16 of 16

ClarkDietrich
2025-12-18

APPENDIX E: Instruments of Traceability

Specimen: 6 in (152mm) SilentXpress™ Sound Wall – Stud pack [2-1/2 in (64 mm). dbl. stud bridged with type CWSC Clip] spaced at 24 in. (610mm) o.c. – 2 Layers 5/8in. (16 mm) Type-X, Source Side - (6 in. (152 mm) R-24 Insulation, stud web not filled) - 2 Layers 5/8 in. (16 mm) Type-X, Receive Side (See Full Report)

<u>Description</u>	<u>Model</u>	<u>Serial Number</u>	<u>Date of Certification</u>	<u>Calibration Due</u>
System 2	3160-A-042	3160-106974	2025-08-20	2026-08-20
Bruel & Kjaer Mic And Preamp C	Type 4943-B-001	2311439	2025-04-11	2026-04-11
Bruel & Kjaer Pistonphone	Type 4228	2781248	2025-07-21	2026-07-21
EXTECH Hygro 959	SD700	A.099959	2025-04-17	2026-04-17
EXTECH Hygro 6015	SD700	A.116015	2025-06-17	2026-06-17

APPENDIX F: Revisions to Original Test Report

Specimen: 6 in (152mm) SilentXpress™ Sound Wall – Stud pack [2-1/2 in (64 mm). dbl. stud bridged with type CWSC Clip] spaced at 24 in. (610mm) o.c. – 2 Layers 5/8in. (16 mm) Type-X, Source Side - (6 in. (152 mm) R-24 Insulation, stud web not filled) - 2 Layers 5/8 in. (16 mm) Type-X, Receive Side (See Full Report)

<u>Date</u>	<u>Revision</u>
2026-02-03	Original report issued
2026-02-05	Page 10: Added Figure 10 per sponsor's request. -EPW
2026-07-09	All Pages: Changed insulation nominal thermal designation to R-24 per sponsor's request. -EPW

END