

EasyClip™ D-Series™ Anchor Clip/EasyClip™ T-Series™ Tall Anchor Clip

Cost-effective tie-down solutions for knee walls, shearwalls and truss connections

ClarkDietrich EasyClip™ D-Series™ anchor clips and T-Series™ tall anchor clips are high-performance, cost-effective solutions for knee wall-to-foundation connections, light-duty shearwall-to-foundation connections and truss-to-wall connections. These multi-application clips feature reinforced stiffening ribs that provide superior design values for maximum performance. The EasyClip D-Series anchor clips and T-Series tall anchor clips are designed to resist horizontal, torsional and vertical (uplift) loads. These clips are prepunched with a series of attachment holes including anchor bolt, Kwik-Con and screw holes, for efficient and accurate fastener placement.

ALTERNATIVE PRODUCTS

EasyClip™ A-Series™ End Clip
 SwiftClip™ LA-Series™ Support Clip
 Uni-Clip™

PRODUCT DIMENSIONS

EasyClip D-Series:


2" x 2" x 3-1/2"

2" x 2" x 5-1/2"


EasyClip T-Series:

2" x 4" x 3-1/2"

2" x 4" x 5-1/2"

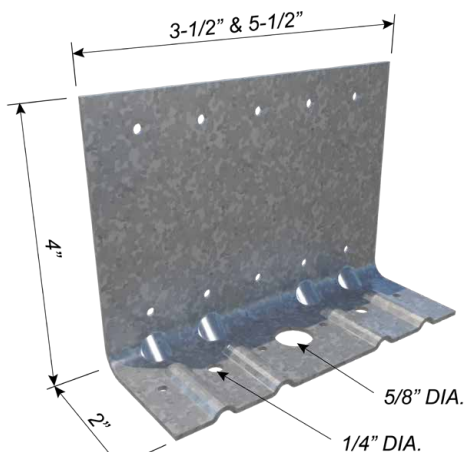

EasyClip T-Series Tall Anchor Clip

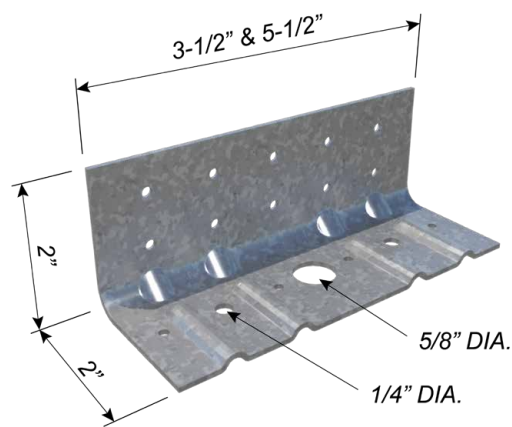

EasyClip D-Series Anchor Clip

MATERIAL SPECIFICATIONS

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Gauge: 12 gauge (97mils)

Design Thickness: 0.1017 inches

Coating: G90

Yield Strength: 50ksi

ASTM: A653/A653M

INSTALLATION

Install EasyClip D-Series and T-Series anchor clips by attaching the screw hole-only leg to the web of the stud, joist, rafter or track with the applicable number of fasteners (screws or welds). Secure bottom leg (anchor bolt hole) to structure using prepunched holes provided with appropriate fastener type and number of fasteners according to design based on load requirements.

EasyClip™ D-Series™ Anchor Clips and T-Series™ Tall Anchor Clips

Clip Designation	Thickness		Size (in)	Packaging Pcs./Bucket
	mils (ga)	Design Thickness (in)		
D683	68 (14)	0.0713	2 x 2 x 3-1/2	40
T683	68 (14)	0.0713	2 x 4 x 3-1/2	40
D685	68 (14)	0.0713	2 x 2 x 5-1/2	40
T685	68 (14)	0.0713	2 x 4 x 5-1/2	40
D973	97 (12)	0.1017	2 x 2 x 3-1/2	40
T973	97 (12)	0.1017	2 x 4 x 3-1/2	40
D975	97 (12)	0.1017	2 x 2 x 5-1/2	40
T975	97 (12)	0.1017	2 x 4 x 5-1/2	40

EasyClip™ D-Series™ Anchor Clips and T-Series™ Tall Anchor Clips

ALLOWABLE LOADS (LBS)

Clip Designation	Stud Thickness mils (ga)	Stud Fy (ksi)	F1 (Shear), (lbs)			F2 (Tension), (lbs)			M (Moment), (in-lbs)	
			Number of #10-16 Screws to Stud						Kwik-Cons/ screws	1/2" Dia. Kwik-Bolts
			4	6	10	4	6	10		
D683	33 (20)	33	374	466	664*	444	444	444	1418	1068
	43 (18)	33	556	692*	986*#	444	444	444	1675	1068
	54 (16)	33	783*	974*#	1389*#	444	444	444	1675	1068
	54 (16)	50	1107*#	1377*#	1962*#	444	444	444	1675	1068
D973	33 (20)	33	374	466	664	560	840	889	1418	1418
	43 (18)	33	556	692	986*	832	889	889	2107*	2054
	54 (16)	33	783	974*	1389*#	889	889	889	2447*	2054
	54 (16)	50	1107*	1377*#	1962*#	889	889	889	2447*	2054
T683	33 (20)	33	280	383	604	444	444	444	1787*	1106
	43 (18)	33	416	569	897	444	444	444	2072*	1106
	54 (16)	33	586	802*	1264*#	444	444	444	2072*	1106
	54 (16)	50	828*	1133*#	1786*#	444	444	444	2072*	1106
T973	33 (20)	33	280	383	604	560	840	889	1787*	1787
	43 (18)	33	416	569	897	832	889	889	2527*	2110
	54 (16)	33	586	802	1264*	889	889	889	2527*	2110
	54 (16)	50	828	1133*	1786*#	889	889	889	2527*	2110
D685	33 (20)	33	456	599	879	560	698	698	2019	2019
	43 (18)	33	677	890	1306*	698	698	698	2865*	2234
	54 (16)	33	954	1254*	1839*#	698	698	698	2865*	2234
	54 (16)	50	1348*	1772*	2599*#%	698	698	698	2865*	2234
D975	33 (20)	33	456	599	879	560	840	889	2019	2019
	43 (18)	33	677	890	1306*	832	889	889	2999*	2999
	54 (16)	33	954	1254*	1839*#	889	889	889	3477*	3167
	54 (16)	50	1348*	1772*	2599*#%	889	889	889	3477*	3167
T685	33 (20)	33	337	445	678	560	698	698	2298*	1968
	43 (18)	33	501	661	1008*	698	698	698	3415*	1968
	54 (16)	33	706	931	1420*	698	698	698	3509*	1968
	54 (16)	50	997*	1316*	2006*#%	698	698	698	3509*	1968
T975	33 (20)	33	337	445	678	560	840	889	2298*	2298
	43 (18)	33	501	661	1008*	832	889	889	3415*	3059
	54 (16)	33	706	931	1420*	889	889	889	4416*	3059
	54 (16)	50	997*	1316*	2006*#%	889	889	889	4416*	3059

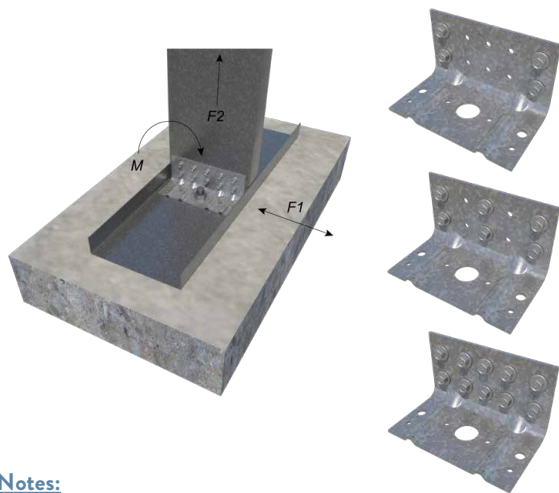



Figure 1 Kwik-Cons

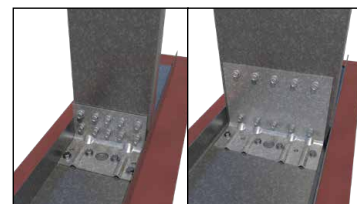


Figure 2 #12-24 screws




Figure 3 Kwik-Bolts

Notes:

- Capacities listed in the table/notes assume that no load reductions are required for spacing or edge distance of Kwik-Cons, screws, or Kwik-Bolts.
- An "*" in the shear column indicates that the shear capacity is limited to 642 lbs for D683 and T683 clips, 917 lbs for D973 and T973 clips, and 994 lbs for D685, D975, T685, and T975 clips when using 1/4" x 1-3/4" Hilti® Kwik-Cons to 3000psi concrete as shown in Figure 1.
- A "#" in the shear column indicates that the shear capacity is limited to 963 lbs for D683 and T683 clips, 1374 lbs for D973 and T973 clips, and 1816 lbs for D685, D975, T685, and T975 clips when using #12-24 self-tapping screws to 3/16" A36 steel as shown in Figure 2.
- A "%" in the shear column indicates that the shear capacity is limited to 1970 lbs when using 1/2" x 2-1/4" Hilti Kwik-Bolts to 3000psi concrete as shown in Figure 3.
- A "*" in the moment column indicates that moment capacity is limited to 1706 in.-lb. for 3" clips, and 2231 in.-lb. for 5" clips when using 1/4" x 1-3/4" Hilti-Cons to 3000psi concrete as shown in Figure 1.
- Tabulated moment capacity is limited to a serviceability of 0.02 radians, or 1.1 degrees of rotation at the connection.
- For 20 and 18 gauge studs, the tabulated moment capacity is based on 18 gauge minimum base track, with (1) #10-16 screw at each track leg to stud flange. For 16 gauge and heavier studs, the base track shall be 14 gauge minimum.
- Tabulated moment capacity is based on a stud to clip connection using (6) #10-16 screws.
- For single-bolt connections, rotational restraint must be provided by the base track.
- For 14 gauge (68mils) and 12 gauge (97mils), use the tabulated values for 16 gauge (54mils), 50ksi studs.
- It is the responsibility of the designer to properly detail connections on the contract drawings.
- Use a linear interaction equation for connections involving any combination of F1, F2, and M.
- Hilti is a registered trademark of Hilti Aktiengesellschaft Corporation.